COEGARD Wallcoat EP（0.2~0.3mm）

水性环氧墙面涂层
WATER-BASED EPOXY WALL COATING

COEGARD Wallcoat EP（0.2~0.3mm）是双组份水性环氧墙面系统。
COEGARD Wallcoat EP（0.2~0.3mm）is a two-component water-based epoxy wall coating.

适用场所 Applications

> 酿酒工业 Wine industry
> 食品及食品加工行业 Food and food processing industry
> 超市 Supermarkets
> 医院 Hospitals
> 制药工业 Pharmaceutical industry
> 屠宰业，鱼肉加工业
Slaughtering industry and meat and fish processing industry
> 化学工业 Chemical industry
> 行车频繁区域如汽修厂及汽车库
Garages and vehicle depots subjected to medium-to-heavy traffic
> 食堂 Canteens
> 轻工业 Light engineering industry
> 展会、交易会 Exhibition and trade fair halls
> 贮藏库 Storage depots

经济型
Economic

洁净度高
High cleanness

可水洗，耐霉变
Washable, mildew-resistant

耐化学品
Chemical-resistant

技术标准 Technical standard	
低温稳定性（3次循环） Low temperature stability（3 cycles）	不变质 No deterioration
低温成膜性 LTFF	5°C成膜无异常 No abnormality at 5°C
对比率（白色和浅色） Contrast ratio（white and light color）	0.95
耐碱性（24h） Alkali resistance（24h）	无异常 No abnormality
耐洗刷性 Scrub resistance	6000次通过 6000 times passed
甲醛含量 Formaldehyde content	16mg/kg
VOC	5g/L
燃烧性能 Combustion performance	A级不燃 Class A non combustible
表干时间 Touch dry	1h

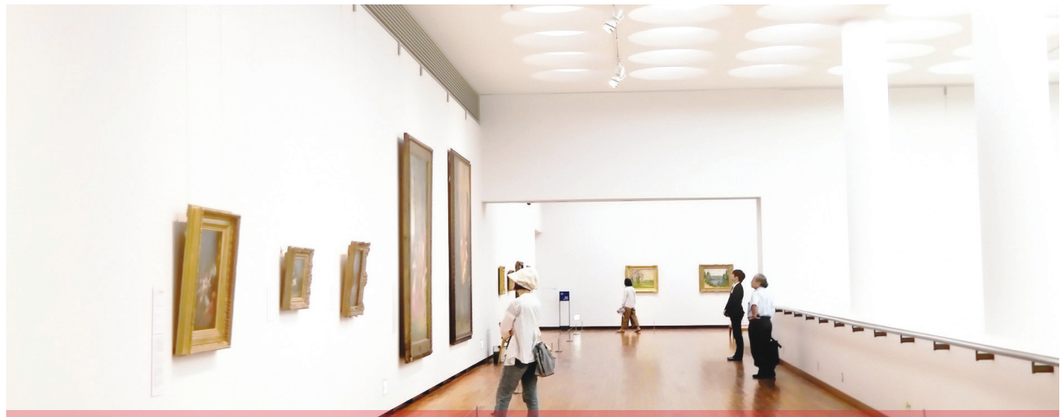
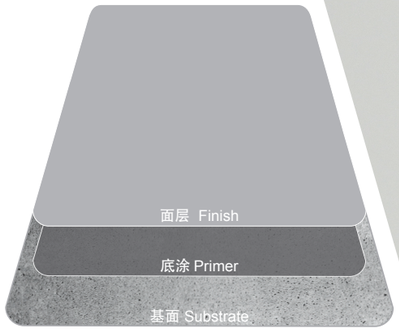
步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
基面 Substrate	处理 Preparation	机械处理，清洁 Mechanical treatment and cleaning of substrate	/	/	/
底涂 Primer	COEGARD Wallcoat EP	水性环氧墙面涂料 Water-based epoxy wall coating	0.2kg/m²	滚涂 Roller	8小时后 Allow 8 hours
面涂 Finish	COEGARD Wallcoat EP	水性环氧墙面涂料 Water-based epoxy wall coating	0.15~0.2kg/m²	滚涂 Roller	/