



COEHARD C330

混凝土保护剂 CONCRETE PROTECTANT

COEHARD C330 是用于混凝土、天然石材和水泥基物质表面的改性有机聚合物水性防护剂，具有抵御各种液体物质和油性物质的功效，能有效防止由毛细管泛潮而引起的污渍，减少液体吸收，处理后的基面易于清洗，能有效降低地面维护成本。水性解决方案，易于施工。具备稳定的抵御紫外线功能，可用于户外。

COEHARD C330 is a water-based sealer for concrete, natural stone and cementitious surfaces made of modified organic polymers, which gives an excellent water and oil repellent effect. The treated substrate surface is easy to clean, which can effectively reduce the ground maintenance costs. It is a water-based solution and easy to apply. With stable UV resistance, it can be used outdoors.

适用场所 Applications

- > 工业厂房 Industrial plants
- > 超市 Supermarkets
- > 大卖场 Hypermarkets
- > 停车场 Parking area
- > 仓储及物流区域
Warehouses, logistics area


有效提高混凝土基面憎水性能
Improving the hydrophobicity
of the substrate

施工渗透性优异
Excellent penetrability

维持基面 A 级防火性能
Maintain fire class A substrate

作用持久
Durable

技术标准 Technical standard	
密度 Density	1.0g/cm ³
PH值 PH value	8
氯离子含量 Chloride ion content (EN1015-17)	< 0.05%
沉浸油中的吸收性 Absorbency immersed in oil (EN13580)	< 0.35%
毛细管吸收性 Capillary absorbency (EN13057)	< 0.25kg/m ² ·h ^{0.5}

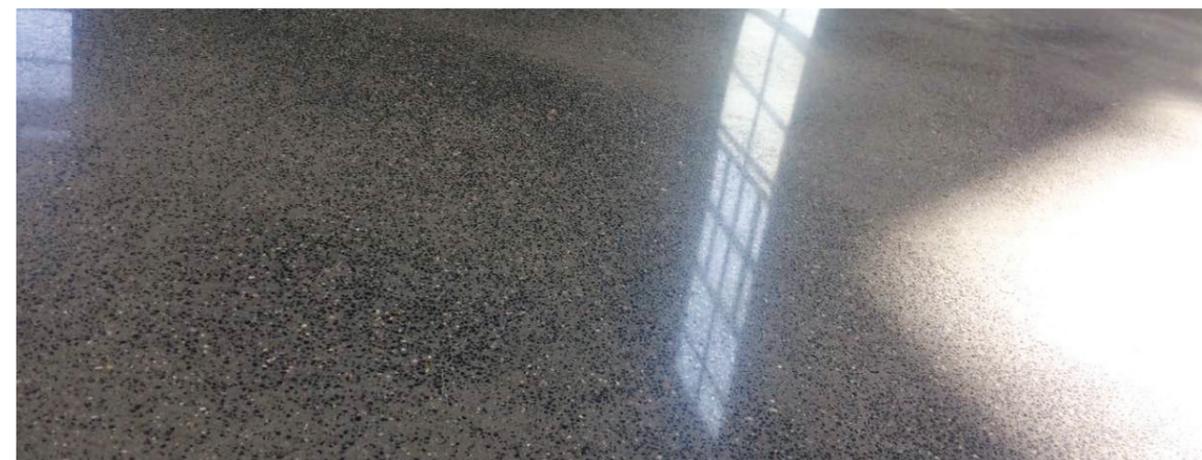

步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
基面 Substrate	处理 Preparation	机械处理, 清洁 Mechanical treatment and cleaning of substrate	—	—	—
耐磨层 Abrasion-resistant layer	COETOP T20	干撒式硬化耐磨材料 Dry-shake floor hardener	4~6kg/m ² (彩色 Colored 6~8kg/m ²)	人工或机械撒布 机械抹平收光 Dry shake & power float	28天后 Allow 28 days
	COETOP T25 / T25N		5~7kg/m ² (彩色 Colored 6~8kg/m ²)		
	COETOP T30		6~8kg/m ² (彩色 Colored 7~9kg/m ²)		
保护层 Protective sealer	COEHARD C330	混凝土保护剂 Concrete protective sealer	0.1~0.4kg/m ²	喷洒 + 抛光 Spray + polish	—

