DEKORAL（3mm）

纹理效果 / 彩色水泥基系统
TEXTURED / COLORED EFFECT CEMENT-BASED SYSTEM

DEKORAL（3mm）是水泥基系统，可以施工成带纹理效果或彩色的无缝装饰地面，适用于住宅或商业项目。3mm 厚度可以做出“威尼斯风格”，为新建或维修项目提供高雅且独特的地坪解决方案。
优良的耐化学品及机械性能，突出的环保性及 A 类健康等级使 DEKORAL 成为高性能的环保型装饰解决方案。
DEKORAL（3mm）is a cement-based system specifically designed to create uninterrupted decorative floorings with a textured or colored effect in residential and commercial buildings. With a thickness of 3 mm, it boasts all the beauty and color variety of “Venetian stuccoes” and provides an elegant and unique flooring solution for both new construction projects and renovations.
Its high chemical resistance, good mechanical properties combined with its high environmental sustainability and first-level health class make DEKORAL a high-performance and environmentally-sustainable decorative solution.

适用场所 Applications

> 公寓 Apartments
> 别墅 Houses
> 商店 Shops
> 展厅 Showrooms
> 办公室 Offices
> 会议场所 Conference halls
> 宾馆 Hotels
> 餐厅及酒吧 Restaurants and bars

装饰性极佳
Very attractive appearance

优良的物理抗性
Good physical resistance

环保
Environment-friendly

超常的导热性能
Exceptional thermal conductivity

技术标准 Technical standard	
交通载荷 Traffic load	轻 / 中度 Light / medium
施工温度 Application temperature	+10˚C~30˚C
防火等级 Reaction to fire	B_{fl}s1
腐蚀性物质的释放 Release of corrosive substances	SR
耐磨性 Wear resistance	AR0.25
粘结强度 Bond strength	B2.5
耐冲击性 Impact resistance	IR10
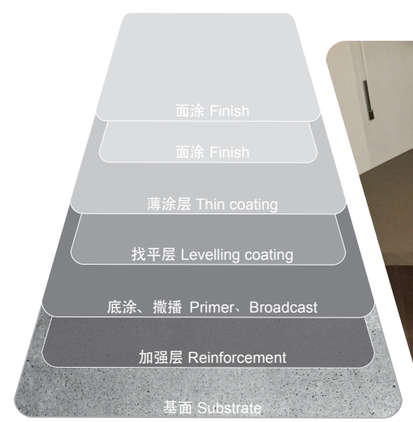
步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
基面 Substrate	处理 Preparation	机械处理，清洁 Mechanical treatment and cleaning of base	—	—	—
加强层 Reinforcement	FN208B GLASS MESH	4x4 玻纤网格布（160g/m²） 4x4 fiberglass mesh (160g/m²)	1.03kg/m²	—	—
底涂 Primer	PRIMER MU + MICROFILLER R in a 1:1~2 ratio	无溶剂环氧底涂+填充料 Solvent-free epoxy resin primer with added filler	1.0kg/m²	滚涂 / 镘涂 Roller / Trowel	16小时后 Allow 16 hours
撒播 Broadcast	QUARTZ 0.7-1.2	播撒少量石英砂 Sparse broadcast of quartz	1.5kg/m²	用手播撒 Scatter by hand	—
找平层 Levelling coating	DEKORAL BASE	水泥基树脂 Cement-based resin	4.0kg/m²	镘涂 Trowel	8小时后 Allow 8 hours
薄涂层 Thin coating	DEKORAL FINISH	水泥基树脂 Cement-based resin	0.2kg/m²	镘涂 Trowel	8小时后 Allow 8 hours
面涂 Finish	KEMCOGLASS PU1	透明的无溶剂脂肪族聚氨酯树脂 Transparent solvent-free aliphatic polyurethane resin	0.1kg/m²	滚涂 Roller	8小时后 Allow 8 hours
面涂 Finish	KEMCOGLASS PU1	透明的无溶剂脂肪族聚氨酯树脂 Transparent solvent-free aliphatic polyurethane resin	0.1kg/m²	滚涂 Roller	—